

Tech Specs

UniFi UISP Branding


UniFi Cloud Gateways WiFi Switching Cloud Keys & Gateways Camera Security Door Access Phone System New Integrations Accessories

airFiber 60 Long-Range

Datasheet

Installation Guide

Marketing Images

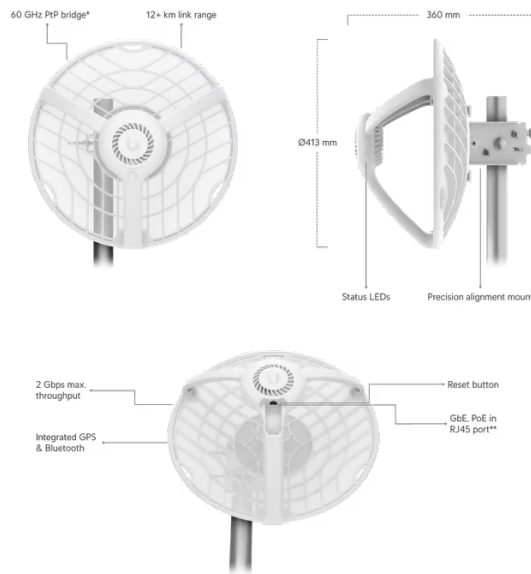

*airFiber is normally purchased in pairs to form a single link.
**48V DC, 0.65A GbE PoE adapter included.

Mechanical

Dimensions	Ø413 x 360 mm (Ø16.3 x 14.2")
Weight	Without mount: 1.5 kg (3.3 lb) With mount: 2.7 kg (6 lb)
Enclosure materials	Aluminum, UV stabilized polycarbonate
Mount material	Galvanized steel
Mounting	Precision alignment kit (included) Pole compatibility: Ø25.4 to 76.2 mm (Ø1 to 3")
Wind loading	420 N at 200 km/h (94.4 lbf at 125 mph)

Hardware

Processor	Quad-Core ARM® Cortex® A7
Memory	256 MB DDR3
Networking interface	(1) GbE RJ45 port
Max. power consumption	22W
Power method	Passive PoE 4-pairs (1, 2+; 3, 6-) (4, 5+; 7, 8-) Passive PoE 2-pairs (4, 5+; 7, 8-), for 44-54V DC only
Power supply	48V DC, 0.65A gigabit PoE adapter (included)
Supported voltage range	44-54V DC 22-27V DC
GPS	Yes

RF connections	Internal
ESD/EMP protection	Air/contact: ± 24kV
Operating temperature	-40 to 60° C (-40 to 140° F)
Operating humidity	5 to 95% noncondensing
Certifications	FCC, IC, CE

Software

Operating mode	PtP only
Ubiquiti specific features	Wave technology, discovery utility
Network	Bridge mode
Services	UISP, ping watchdog, NTP client
Tools	Antenna alignment, discovery utility, ping, trace route, speed test
Software management	Bluetooth management for easy setup over UISP app WEB UI
Minimum software requirements	Any modern web browser/iOS™ or Android™ based smartphone

System

Max. throughput	1.95 Gbps
Max. range	12+ km
Encryption	WPA2-PSK (AES)

RF

Operating frequency*	57-71 Ghz <small>* Depends on regulatory region.</small>
Channel bandwidth	2160, 1080 MHz
Polarization	Vertically linear
Beamwidth	Azimuth: 3 dB 1.6° Elevation: 3 dB 1.6°

LEDs

Power	Flashing white: bootup in progress White: not connected to UISP application Blue: connected to UISP application
Ethernet	Flashing blue: Ethernet activity
GPS	Blue: receiving at least (4) GPS satellite signals
60G	Blue: active connection

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.