

Tech Specs

UniFi UISP Branding


UniFi Cloud Gateways WiFi Switching Cloud Keys & Gateways Camera Security Door Access Phone System New Integrations Accessories

WiFi > U6 Pro

Datasheet

Installation Guide

Marketing Images

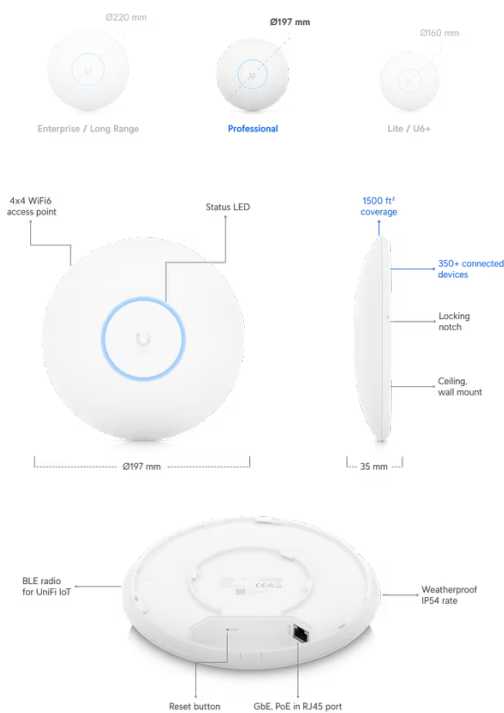

Mechanical

Dimensions	Ø197 x 35 mm (Ø7.76 x 1.38")
Weight	Without mount: 580 g (1.3 lb) With mount: 720 g (1.6 lb)
Enclosure material	Polycarbonate
Mount material	Stainless steel (SUS304)
Weatherproofing	IP54

Hardware

Networking interface	(1) GbE RJ45 port
Management interface	Ethernet Bluetooth
Power method	PoE
Power supply	UniFi PoE switch PoE adapter (not included)
Supported voltage range	44—57V DC
Max. power consumption	13W
Max. TX power 2.4 GHz	22 dBm

5 GHz	26 dBm
MIMO	
2.4 GHz	2 x 2 (UL MU-MIMO)
5 GHz	4 x 4 (DL/UL MU-MIMO)
Throughput rate	
2.4 GHz	573.5 Mbps
5 GHz	4.8 Gbps
Antenna gain	
2.4 GHz	4 dBi
5 GHz	6 dBi
LEDs	White/blue
Button	Factory reset
Mounting	Wall/ceiling (Included)
Operating temperature	-30 to 60° C (-22 to 140° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

Software

WiFi standards	802.11a/b/g WiFi 4/WiFi 5/WiFi 6
Wireless security	WPA-PSK, WPA-Enterprise (WPA/WPA2/WPA3)
BSSID	8 per radio
VLAN	802.1Q
Advanced QoS	Per-user rate limiting
Guest traffic isolation	Supported
Concurrent clients	350+
Zero wait DFS	Yes* <small>*Supported with upcoming firmware versions</small>


Supported Data Rates

802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11b	1, 2, 5.5, 11 Mbps
802.11g	6, 9, 12, 18, 24, 36, 48, 54 Mbps
802.11n (WiFi 4)	6.5 Mbps to 600 Mbps (MCS0 - MCS31, HT 20/40)
802.11ac (WiFi 5)	6.5 Mbps to 3.4 Gbps (MCS0 - MCS9 NSS1/2/3/4, VHT 20/40/80/160)
802.11ax (WiFi 6)	7.3 Mbps to 4.8 Gbps (MCS0 - MCS11 NSS1/2/3/4, HE 20/40/80/160)

Application Requirements

UniFi Network	Version 6.1.56 and later
----------------------	--------------------------

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.