

UniFi UISP Branding

Q u7-pro

Switching

WiFi

Camera Security

Door Access

Integrations

Advanced Hosting


Wall > U7 Pro Wall

Datasheet

In The Box

Marketing Images

Installation Guide

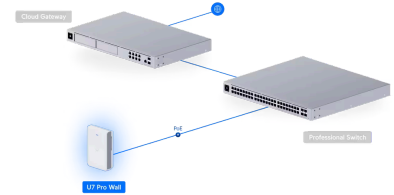

Overview

Dimensions	150 x 103 x 36 mm (5.9 x 4.1 x 1.4")
WiFi Standard	WiFi 7
Spatial Streams	6
Coverage Area	140 m ² (1,500 ft ²)
Max. Client Count	300+
Uplink	2.5 GbE
Mounting	Wall (Mount Included)
Power Method	PoE+

Performance

MIMO	
6 GHz	2 x 2 (DL/UL MU-MIMO)

5 GHz	2 x 2 (DL/UL MU-MIMO)
2.4 GHz	2 x 2 (DL/UL MU-MIMO)
Max. Data Rate	
6 GHz	5.8 Gbps (BW320)
5 GHz	4.3 Gbps (BW240)
2.4 GHz	688 Mbps (BW40)
Antenna Gain	
6 GHz	6 dBi
5 GHz	5 dBi
2.4 GHz	4 dBi
Max. TX Power	
6 GHz	23 dBm
5 GHz	26 dBm
2.4 GHz	22 dBm
Max. BSSIDs	8 per Radio
Supported Data Rates	
802.11be (WiFi 7)	7.3 Mbps to 5.8 Gbps (MCS0 - MCS13 NSS1/2, EHT 20/40/80/160/240/320)
802.11ax (WiFi 6/6E)	7.3 Mbps to 2.4 Gbps (MCS0 - MCS11 NSS1/2, HE 20/40/80/160)
802.11ac (WiFi 5)	6.5 Mbps to 1.7 Gbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80/160)
802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)

^ Features

Wireless Meshing	✓
Band Steering	✓
802.11v BSS Transition Management	✓
802.11r Fast Roaming	✓
802.11k Radio Resource Management (RRM)	✓

Advanced Radio Management	✓
Passpoint (Hotspot 2.0)	✓
Captive Hotspot Portal	
Custom Branding Landing Page	✓
Voucher Authentication	✓
Payment-Based Authentication	✓
External Portal Server Support	✓
Password Authentication	✓
Guest Network Isolation	✓
Private Pre-Shared Key (PPSK)	✓
WiFi Speed Limiting	✓
Client Device Isolation	✓
WiFi Schedules	✓
RADIUS over TLS (RadSec)	✓
Dynamic RADIUS-assigned VLAN	✓

^ **Hardware**

Max. Power Consumption	22W
Supported Voltage Range	44—57V DC
Networking Interface	(1) 1/2.5 GbE RJ45 port
Weight	580 g (1.3 lb)
Management	Ethernet
Enclosure Material	Polycarbonate, aluminum
Mount Material	Aluminum
LEDs	
System	White/Blue
Channel Bandwidth	HT 20/40, VHT 20/40/80/160, HE 20/40/80/160, EHT 20/40/80/160/240/320 (MHz)
Certifications	CE, FCC, IC
NDAA Compliant	✓

Operating Frequency

US/CA:
2400 - 2472 MHz
U-NII-1: 5150 - 5250 MHz
U-NII-2A: 5250 - 5350 MHz
U-NII-2C: 5470 - 5725 MHz
U-NII-3: 5725 - 5850 MHz
U-NII-5 to U-NII-8 : 5925 - 7125 MHz

Worldwide:
2400 - 2483.5 MHz
5150 - 5725 MHz
5925 - 7125 MHz

Ambient Operating Temperature -30 to 60° C (-22 to 140° F)

Ambient Operating Humidity 5 to 95% noncondensing

^ **Software**

Application Requirements

UniFi Network Version 8.1.113 and later

Stay in Touch



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.