

UniFi UISP Branding

Q

udb

Switching WiFi Camera Security Door Access Integrations Advanced Hosting


Bridging > [Device Bridge](#)

Datasheet

In The Box

Marketing Images

Installation Guide

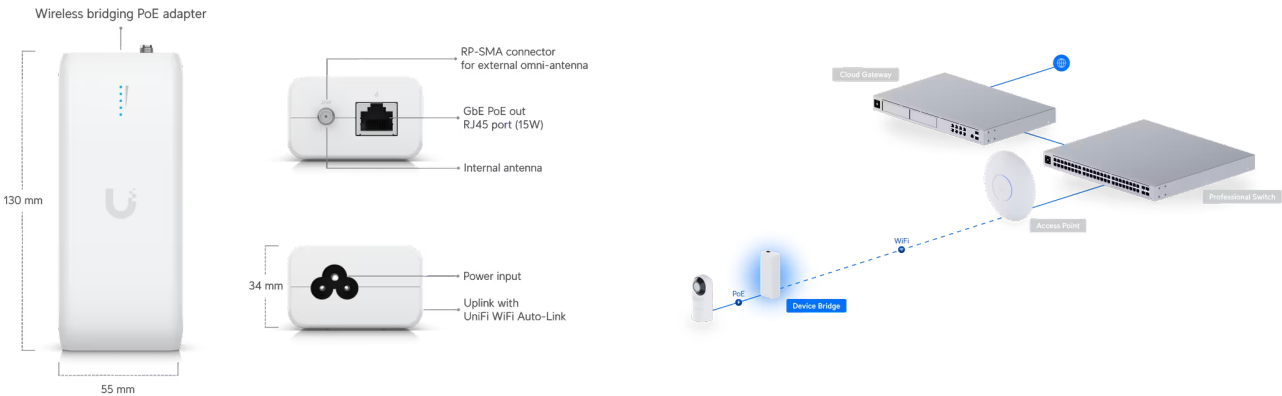

Overview

Dimensions	130 x 55 x 34 mm (5.1 x 2.2 x 1.3")
WiFi Standard	WiFi 5
Spatial Streams	2
Mounting Locations	Wall, table
Mounting	Wall (Included)
Power Method	100—240V AC, 0.45A Max., 50/60 Hz

Performance

MIMO

5 GHz	2 x 2
Max. Data Rate	
5 GHz	866.7 Mbps (BW80)
Antenna Gain	
5 GHz	Internal: 5 dBi External omni: 4 dBi, 360° x 30°
Max. TX Power	
5 GHz	21 dBm
Supported Data Rates	
802.11ac (WiFi 5)	6.5 Mbps to 866.7 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80)
802.11n	6.5 Mbps to 300 Mbps (MCS0 - MCS15, HT 20/40)
802.11a	6, 9, 12, 18, 24, 36, 48, 54 Mbps
Wireless Security	WPA2 AES
^ Hardware	
Max. Power Consumption	25W (AC input) 10W (Excluding PoE output)
Supported Voltage Range	100—240V AC
Networking Interface	(1) GbE RJ45 port
Antennas	(1) Internal antenna (1) RP-SMA connector for external omni-antenna
Management	WiFi
Weight	200 g (7.1 oz)
Mount Material	Polycarbonate
Enclosure Material	Polycarbonate
Button	(1) Factory-reset
LEDs	
System	(4) Blue: signal (1) White/blue: indicator
Channel Bandwidth	20/40/80 (MHz)
NDAA Compliant	✓

Certifications	CE, FCC, IC
Operating Frequency	US/CA:
	U-NII-1 5150 - 5250 MHz
	U-NII-2A 5250 - 5350 MHz
	U-NII-2C 5470 - 5725 MHz
	U-NII-3 5725 - 5850 MHz
	Worldwide:
	5150 - 5875 MHz
Ambient Operating Temperature	-10 to 40° C (14 to 104° F)
Ambient Operating Humidity	5 to 95% noncondensing

Stay in Touch

Email

Subscribe



[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.