

Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)

[WiFi](#)

[Switching](#)

[Cloud Keys & Gateways](#)

[Camera Security](#)

[Door Access](#)

[Phone System](#)

[New Integrations](#)


[Accessories](#)

Accessories > [Power Backup](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

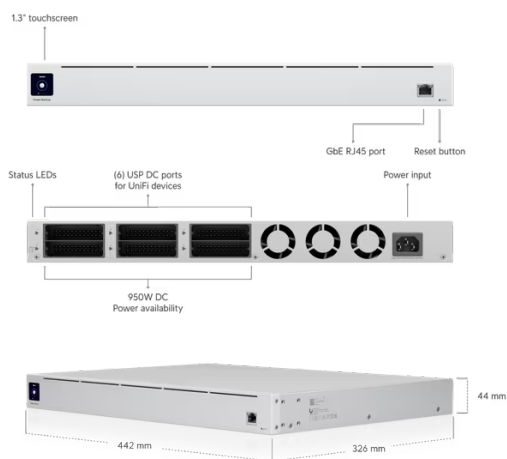

Mechanical

Dimensions	442.4 x 325.6 x 43.7 mm (17.4 x 12.8 x 1.7")
Weight	Without mount brackets : 5.5 kg (12.13 lb) With mount brackets: 5.6 kg (12.32 lb)

Hardware

Networking interface	(1) 10/100/1,000 MbE RJ45 port
Management interface	Ethernet In-Band
Power output	(6) RPS DC ports
Power method	(1) Universal AC input, 100—240V AC
Max. power consumption	995W
Power supply	Internal 350W AC/DC Internal 645W AC/DC
Supported voltage range	100—240V AC
Total output power	
52V DC	11.54A (600W)
11.5V DC	30.44A (350W)
Max. output power per RPS port	
52V DC	11.54A (600W)
11.5V DC	30.44A (350W)
Display	1.3" touchscreen
ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

LEDs

System	Status
Ethernet	Link/activity
USP RPS	Activity

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.