

Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)

[WiFi](#)

[Switching](#)

[Cloud Keys & Gateways](#)

[Camera Security](#)

[Door Access](#)

[Phone System](#)

[New Integrations](#)


[Accessories](#)

Switching > [Standard 48 PoE](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

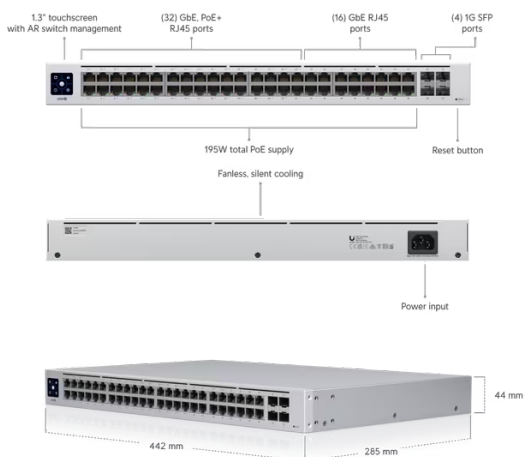

Mechanical

Dimensions	442.4 x 285 x 43.7 mm (17.4 x 11.2 x 1.7")
Weight	Without mounting brackets: 4.5 kg (10 lb) With mounting brackets: 4.6 kg (10.2 lb)
Enclosure material	SGCC steel

Hardware

Management interface	Ethernet In-Band
Networking interface	(48) GbE RJ45 ports (4) 1G SFP ports
PoE interface	(32) PoE/PoE+ (Pins 1, 2+; 3, 6-)
Total non-blocking throughput	52 Gbps
Switching capacity	104 Gbps
Forwarding rate	77.38 Mpps
Power method	Universal input, 100—240V AC, 50/60 Hz
Power supply	AC/DC, internal, 240W
Supported voltage range	100—240V AC
Max. power consumption	45W (Excluding PoE output)
Total PoE available	195W
Max. PoE wattage per port by PSE	PoE+: 32W
Voltage range PoE mode	PoE: 44—57V PoE+: 50—57V
ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
Shock and vibration	ETSI300-019-1.4 Standard

Operating temperature	-5 to 40° C (23 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

LEDs

System	Status
Ethernet	PoE Speed/link/activity
SFP	Link/activity

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.