

Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System

New Integrations


Accessories

Switching > [Flex](#)

Datasheet

Installation Guide

Marketing Images

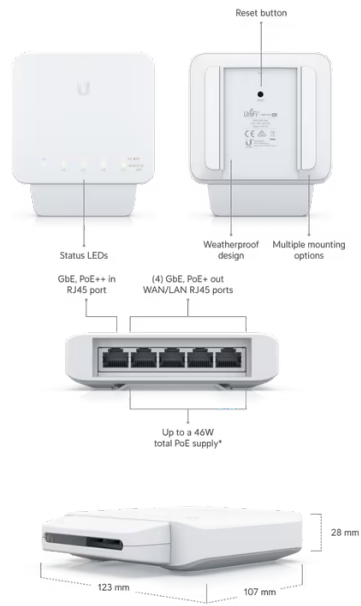

*When powered with a PoE++ switch or a 60W PoE adapter (sold separately).

Mechanical

| | |
|------------|--|
| Dimensions | 122.5 x 107.1 x 28 mm (4.8 x 4.2 x 1.1") |
| Weight | 230 g (8.11 oz) |

Hardware

| | |
|-------------------------------|--|
| Management interface | Ethernet In-Band |
| Networking interface | (5) GbE RJ45 ports |
| PoE interface | (4) PoE+ (Pins 1, 2+; 3, 6-) |
| Total non-blocking throughput | 5 Gbps |
| Switching capacity | 10 Gbps |
| Power method | PoE++ |
| Power supply | PoE/PoE+ (Pins 1, 2+; 3, 6-) PoE++ (Pins 1, 2+; 3, 6- and 4, 5+; 7, 8-) 50V/60W PoE adapter (Not included) |
| Supported voltage range | PoE: 44—57V DC PoE+/PoE++: 50—57V DC |
| Max. power consumption | 5W (Excluding PoE output) |
| Total available PoE | 46W* |

*When powered with a PoE++ switch or a 60W PoE adapter(sold separately).

| | |
|----------------------------------|--|
| Max. PoE wattage per port by PSE | 25W |
| ESD/EMP protection | Air/contact: ± 16kV |
| Button | Factory reset |
| Operating temperature | 46W PoE output: -40 to 55° C (-40 to 131° F) 25W PoE output: -40 to 65° C (-40 to 149° F) |
| Operating humidity | 5 to 95% noncondensing |
| Certifications | CE, FCC, IC |

LEDs

| | |
|----------|----------------------------|
| System | Status |
| Ethernet | PoE Speed/link/activity |
| PoE | Link/activity |

Application Requirements

| | |
|---------------|--------------------------|
| UniFi Network | Version 5.10.3 and later |
|---------------|--------------------------|

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.