

Tech Specs

UniFi UISP Branding


UniFi Cloud Gateways WiFi Switching Cloud Keys & Gateways Camera Security Door Access Phone System New Integrations Accessories

Camera Security > AI 360

Datasheet

Installation Guide

Marketing Images

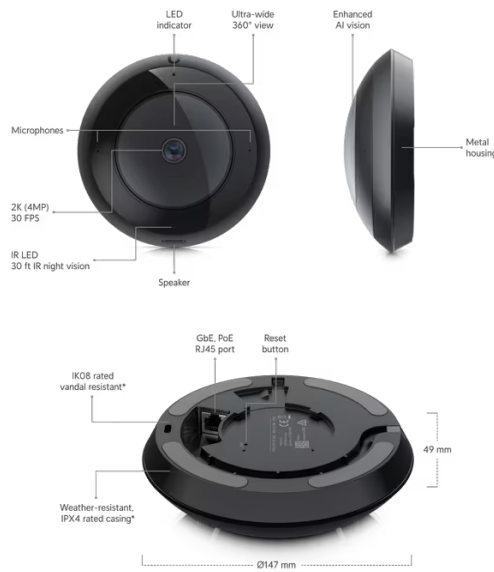

*With bubble lens cover (included).

Mechanical

Dimensions	Ø147 x 49 mm (Ø5.77 x 1.94")
Weight	Without mount: 655 g (1.44 lb) With outdoor accessory: 685 g (1.51 lb)
Enclosure materials	Aluminum alloy, polycarbonate, hard-coated dome
Mount materials	Polycarbonate, stainless steel
Weatherproofing	IPX4
Resistance	IK08

Optics

Sensor	5MP CMOS sensor
Lens	Fisheye lens
View angle	360°
Night mode	Built-in IR LED illumination and IR cut filter

Video

Video compression	H.264
Resolution	4MP 1920 x 1920 (1:1)
Max. frame rate	30 FPS

Image settings

Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, masking, text overlay

System

Processor	Quad-core Arm® Cortex®-A53 based chip
Networking interface	GbE RJ45 port
Power method	PoE
Power supply	48V DC, 0.18A PoE
Max. power consumption	8.64W
Supported voltage range	37—57V DC
LED	R/G/B/W
Button	Factory reset
Operating temperature	-20 to 40° C (-4 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

Audio

Microphone	Yes (Can be disabled)
Speaker	Yes

Software

Web application	UniFi Protect: Version 1.10.0 and later
Mobile app	UniFi Protect iOS™ and Android™

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.