

Tech Specs

UniFi UISP Branding


[UniFi Cloud Gateways](#) [WiFi](#) [Switching](#) [Cloud Keys & Gateways](#) [Camera Security](#) [Door Access](#) [Phone System](#) [New Integrations](#) [Accessories](#)

Camera Security > [AI Theta](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

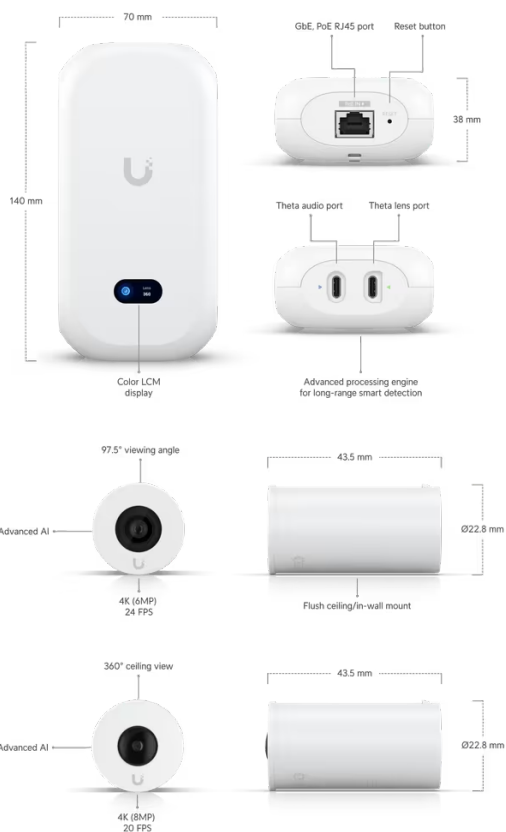

Mechanical

Dimensions

UVC-AI-Theta-Hub: 140 x 70 x 38 mm (5.5 x 2.8 x 1.5")
UVC-AI-Theta-Lens/360: Ø22.8 x 43.5 mm (Ø0.9 x 1.7")

Weight

UVC-AI-Theta-Hub: 330 g (11.6 oz)
UVC-AI-Theta-Hub Mount: 35 g (1.2 oz)
UVC-AI-Theta-Lens/360: 15 g (0.5 oz)
UVC-AI-Theta-Lens/360 Flush Mount: 12 g (0.4 oz)

Enclosure materials

UVC-AI-Theta-Hub: aluminum alloy
UVC-AI-Theta-Lens/360: aluminum alloy, polycarbonate
UVC-AI-Theta-Lens/360 Flush Mount: polycarbonate

Mount materials

UVC-AI-Theta-Hub: aluminum alloy
UVC-AI-Theta-Lens/360: aluminum alloy, polycarbonate
UVC-AI-Theta-Lens/360 Flush Mount: polycarbonate

Cable jacket enclosure dimensions

28 x 13 x 7.5 mm (1.1 x 0.5 x 0.3")

Cable jacket enclosure material

PVC

Cable length

1 m (3.3 ft)

Cable diameter

3.7 mm (0.15")

Cable jacket material

Woven fabric

Cable weight	18 g (0.63 oz)
Cable connector type	Theta proprietary

Optics

Sensor	UVC-AI-Theta-Lens: 8MP CMOS sensor UVC-AI-Theta-Lens-360: 12MP CMOS sensor
Lens	Fixed focal length
View angle	UVC-AI-Theta-Lens: H: 97.5°, V: 79.4°, D: 118.2° UVC-AI-Theta-Lens-360: H: 180°, V: 180°, D: 180°

Video

Video compression	H.264
Resolution	UVC-AI-Theta-Lens: 8MP 3264 x 2448 (4:3) UVC-AI-Theta-Lens-360: 6MP 2560 x 2560 (1:1)
Max. frame rate	UVC-AI-Theta-Lens: 24 FPS UVC-AI-Theta-Lens-360: 20 FPS
Image settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

System

Processor	Quad-core Arm® Cortex®-A53 based chip
Networking interface	GbE RJ45 port
Max. power consumption	12.5W
Power method	PoE
Power supply	5V DC, 0.5A
Supported voltage range	37—57V DC
Output power	5V DC, 1A per port
LED	R/G/B/W
Button	Factory reset
Mounting	Wall, ceiling mount
Operating temperature	-20 to 40° C (-4 to 104o F)
Operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE

Audio

Microphone	Yes (Can be disabled)
Speaker	Yes
Power supply	5V DC, 0.9A

Software

Web application	UniFi Protect: Version 2.7.18 and later
Mobile app	UniFi Protect iOS™ and Android™: Version 1.11.0 and later

Stay in Touch



