

# Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System

New Integrations


Accessories

## G4 Doorbell Pro PoE Kit

Datasheet

Installation Guide

Marketing Images

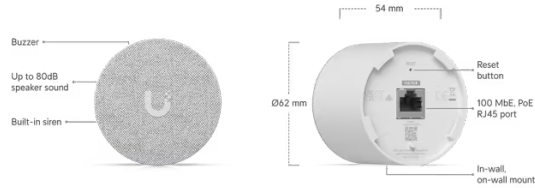

## UVC-G4 Doorbell Pro PoE

### Mechanical

#### Dimensions

Device: 160.6 x 51.7 x 35.1 mm (6.3 x 2 x 1.4")  
Wall mount: 159.3 x 50.3 x 17.5 mm (6.3 x 1.9 x 0.7")  
Wedge: 161.1 x 52.1 x 25.7 mm (6.3 x 2.1 x 1")  
On-wall mount: 161.1 x 52.1 x 25.75 mm (6.3 x 2.1 x 1")

#### Weight

Device: 264 g (9.3 oz)  
Wall mount: 56 g (2 oz)  
Wedge: 33 g (1.2 oz)  
On-wall mount: 53 g (1.9 oz)

#### Enclosure materials

Aluminum alloy, polycarbonate

#### Mount materials

Wall mount: aluminum alloy  
Wedge: polycarbonate  
On-wall mount: polycarbonate

<b>Weatherproofing</b>	IPX4
<b>Color</b>	Black White

---

## Optics

<b>Sensor</b>	Main camera: 5MP CMOS sensor Package camera: 8MP CMOS sensor
<b>Lens</b>	Fixed focal length
<b>View angle</b>	Main camera (LDC On): H: 138°, V: 114°, D: 155° Main camera (LDC Off): H: 160°, V: 117°, D: 160° Package camera: H: 97.5°, V: 79.4°, D: 118.2°
<b>Night mode</b>	Built-in IR LED illumination and IR cut filter

---

## Video

<b>Video compression</b>	H.264
<b>Resolution</b>	Main camera: 2MP 1600 x 1200 (4:3) Package camera: 2MP 1600 x 1200 (4:3)
<b>Max. frame rate</b>	30 FPS

---

## System

<b>Processor</b>	Quad-core Arm® Cortex®-A53 based chip
<b>Networking interface</b>	GbE RJ45 port
<b>Power method</b>	PoE
<b>Supported voltage range</b>	37—57V DC
<b>Max. power consumption</b>	7W
<b>LED</b>	Link/activity
<b>Buttons</b>	(1) Ring button (1) Factory reset
<b>Operating temperature</b>	-30 to 40° C (-22 to 104° F)
<b>Operating humidity</b>	0 to 90% noncondensing
<b>Certifications</b>	CE, FCC, IC

---

## Audio

<b>Microphone</b>	Yes (Can be disabled )
<b>Speaker</b>	Yes

---

## Software

<b>UniFi OS application</b>	UniFi Protect
<b>Mobile app</b>	UniFi Protect iOS™ and Android™

---

## UP-Chime PoE

---

## Mechanical

<b>Dimensions</b>	Device: Ø62 x 54 mm (Ø2.5 x 2.1") In-wall mount: Ø89 x 63.1 mm (Ø3.5 x 2.5") On-wall Mount: Ø62 x 20.2 mm (Ø2.5 x 0.8")
<b>Weight</b>	Device: 158 g (5.6 oz) In-wall mount: 91 g (3.2 oz) On-wall mount: 28 g (1 oz)

Enclosure materials	Aluminum alloy, polycarbonate
Mount materials	Polycarbonate, zinc alloy

---

## System

Processor	Dual-Core Xtensa®, 32 bit ,400 MIPS
Networking interface	10/100 MbE port
Power method	PoE
Supported voltage range	44—57V DC
Max. power consumption	3.5W
ESD/EMP protection	Air: ± 16kV, contact: ± 8kV
LED	R/G/B/W
Button	Factory reset
Operating temperature	0 to 40° C (32 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

---

## Audio

Speaker	Yes
Buzzer	Yes

---

## Software

Web application	UniFi Protect
Mobile app	UniFi Protect iOS™ and Android™

### Stay in Touch

<input type="text" value="Email"/>	<input type="button" value="Subscribe"/>
------------------------------------	--



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.