

Tech Specs

UniFi UISP Branding


[UniFi Cloud Gateways](#) [WiFi](#) [Switching](#) [Cloud Keys & Gateways](#) [Camera Security](#) [Door Access](#) [Phone System](#) [New Integrations](#) [Accessories](#)

Cloud Keys & Gateways > [CloudKey Enterprise](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

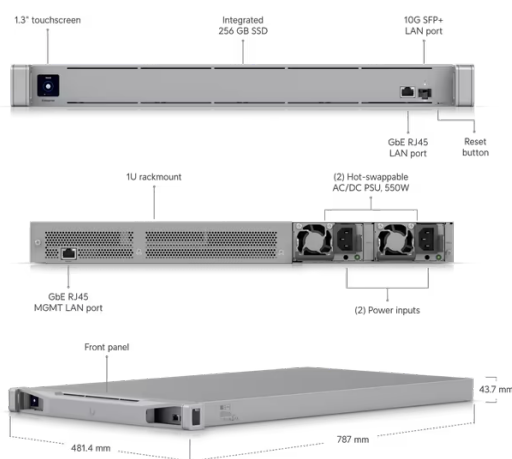

Mechanical

Dimensions 787 x 43.7 x 481.4 mm (31 x 1.7 x 19")

Weight 13.1 kg (28.9 lb)

Enclosure materials Front panel: aluminium
Chassis: SGCC steel

Mount material SGCC steel

Hardware

Processor 16-core Intel® Xeon®-SP Gold 5218 at 2.3 GHz

Memory (2) 16 GB DDR4 ECC RDIMM

On-board storage (1) 256 GB, M.2 2280 SATA

Management interface Ethernet
Bluetooth

Networking interface (1) LAN: GbE RJ45 port
(1) MGMT LAN: GbE RJ45 port

SFP+ interface (1) LAN: 10G SFP+ port

Power method Universal AC input, 100—240V AC, 7A max, 50/60 Hz

Power supply (2) Hot-swappable AC/DC PSU, 550W

LCM display (1) 1.3" touchscreen

Button Factory reset

Operating temperature 0 to 35° C (32 to 95° F)

Operating humidity 8 to 90% noncondensing

Certifications CE, FCC, IC


LEDs

Ethernet	White: link/activity
SFP+	White: link/activity
Power supply	Off: no AC power present Steady green: AC power and DC output active Flashing green: AC power present and DC output inactive Steady amber: AC power lost/failure events Flashing amber: warning events

Application Requirements

UniFi Network	Version 7.3.83 and later
----------------------	--------------------------

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.