

# Tech Specs


UniFi UISP Branding

UniFi Cloud Gateways WiFi Switching Cloud Keys & Gateways Camera Security Door Access Phone System New Integrations Accessories

airMAX LiteBeam 5AC

Datasheet

Marketing Images

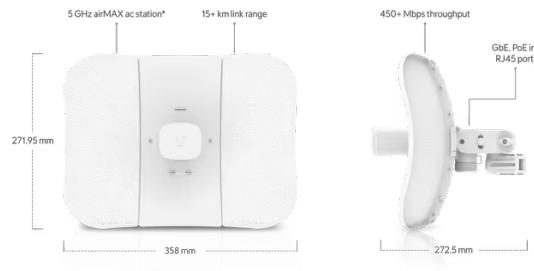

\*Compatible with airMAX ac devices.  
\*\*24V DC, 0.3A GbE PoE adapter included.

## Mechanical

Dimensions	358 x 271.95 x 272.5 mm (14.1 x 10.7 x 10.73")
Weight	Without mount: 800 g (1.76 lb) With mount 980 g (2.16 lb)
Wind survivability	200 km/h (125 mph)
Wind loading	275 N at 200 km/h (61.8 lbf at 125 mph)

## Hardware

Networking interface	(1) GbE RJ45 port
Power method	Passive PoE (pairs 4, 5+; 7, 8 return)
Power supply	24V, 0.3A Gigabit PoE adapter (Included)
Max. power consumption	7W
Max. power output	25 dBm
Gain	23 dBi
Operating temperature	-40 to 70° C (-40 to 158° F)
Operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

## Operating Frequency (MHz)

Worldwide	5150-5875 MHz
USA	
U-NII-1	5150-5250 MHz
U-NII-2A	5250-5350 MHz
U-NII-2C	5240-5725 MHz
U-NII-3	5725-5850 MHz

## Management Radio (MHz)

Worldwide

2412 - 2472 MHz

US/CA

2412 - 2462 MHz

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.