

Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System

New Integrations


Accessories

Door Access > [Access Hub](#)

Datasheet

Installation Guide

Marketing Images

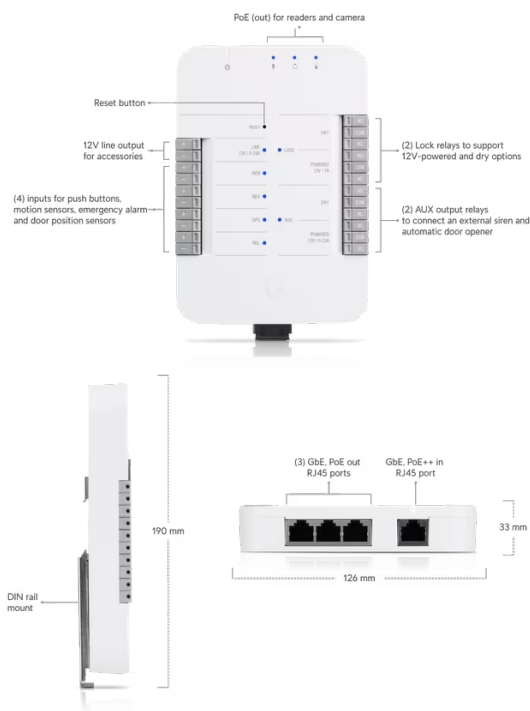

Mechanical


Dimensions	190 x 126 x 30.5 mm (7.48 x 4.96 x 1.2")
Weight	457 g (16.12 oz)
Enclosure material	Plastic Enclosure with Metal Mount Plate
Mounting options	DIN rail

Hardware

Networking interface	(4) 1GbE
Max. power consumption	51W
Power method	PoE++
Input terminals	REX - request to exit REN - request to enter REL - remote release DPS - door position sensor
Dry output relay	
Lock	Rated 30VDC, up to 1A
Aux	Rated 30VDC, up to 1A
Powered output relay	
Lock	12VDC, up to 1A

Aux Line	12VDC, up to 0.33A 12VDC, up to 0.33A
LEDs	(1) System, (3) PoE out, (4) Input (2) Output Relays, (1) 12VDC Out
Buttons	(1) Factory reset
Operating temperature	0 to 40° C (32 to 104° F)
Operating humidity	5 - 90% noncondensing
Certifications	CE, FCC, IC

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.