

Tech Specs

UniFi **UISP** Branding


60 GHz Wireless Wireless Fiber Wired Accessory Tech

Fiber > [UISP Fiber XGS](#)

Datasheet

Installation Guide

Marketing Images

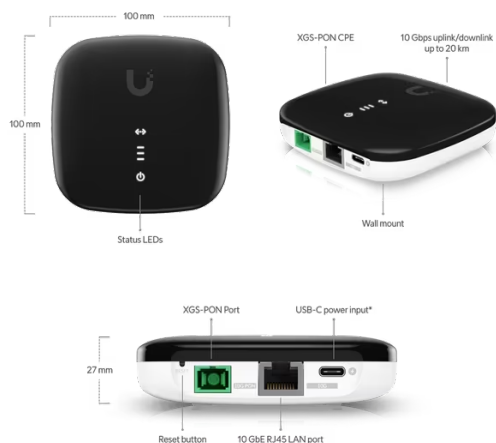

*USB-C 5V DC, 3A adapter included.

Mechanical

Dimensions	100 x 100 x 27 mm (3.9 x 3.9 x 1.1")
Weight	220 g (0.49 lb)
Enclosure material	UV-stabilized polycarbonate

Hardware

Networking interface	(1) SC/APC, ITU-G.9807 XGSPON WAN port (1) 100/1,000/2,500/5,000/10,000 MbE RJ45 LAN ports
Management interface	Ethernet in-band PON
Memory	256 MB DDR
Onboard flash storage	32 MB NOR
Max. power consumption	8W
Power method	USB-C 5V DC, 3A
Power supply	5V DC, 3A power adapter
Supported voltage range	5V DC power adapter
Total non-blocking line rate	Downstream: 9.95 Gbit/s Upstream: 9.95 Gbit/s
Normal TX range of optical module	4 to 9dBm
Normal RX range of optical module	-9 to -26dBm
Button	(1) Factory reset
Operating temperature	-15 to 45° C (5 to 113° F)
Operating humidity	10 to 95% non-condensing

Certifications

CE, FCC, IC

Fiber

Operating wavelength

TX: 1,270nm
RX: 1,577nm

Line code

Scrambled NRZ

Physical reach

20 km

LEDs

Power

White: ON

Ethernet

Steady white: link up
Blinking white: activity
OFF: link down

PON status

(3) signal LEDs
All-OFF: bootup
1x orange: signal too low (< -27 dbm)
1x white: signal low (>= -27 dbm)
2x white: signal good (>= -24 dbm)
3x white: signal strong (>= -12 dbm)
1x orange + 2x white: signal too strong (>= -9 dbm)
3x orange: no signal
LEDs alternate between orange + white + orange and a signal strength indicator: no authority


Software

Management application

UISP: Version 1.5.7 and later

[Compliance Information](#)

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.