

Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)

[WiFi](#)

[Switching](#)

[Cloud Keys & Gateways](#)

[Camera Security](#)

[Door Access](#)

[Phone System](#)

[New Integrations](#)


[Accessories](#)

Switching > [Enterprise 8 PoE](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

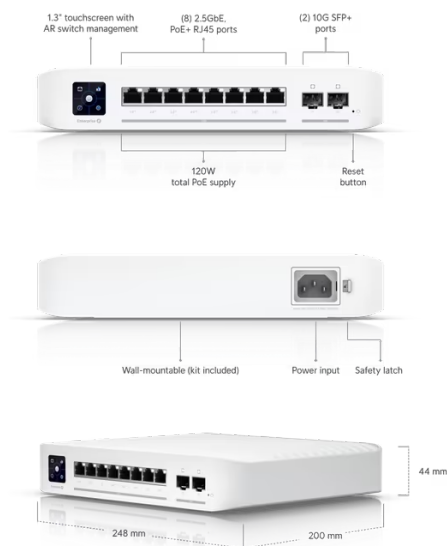

Mechanical

Dimensions	200 x 248 x 44 mm (7.9 x 9.8 x 1.7")
Weight	2.4 kg (5.29 lb)
Enclosure material	Polycarbonate
Mount material	Polycarbonate

Hardware

Management interface	Ethernet In-Band
Networking interface	(8) 2.5 GbE, PoE+ RJ45 ports (2) 10G SFP+
PoE interface	(8) PoE/PoE+ (Pins 1, 2+; 3, 6-)
Total non-blocking throughput	40 Gbps
Switching capacity	80 Gbps
Forwarding rate	59.52 Mpps
Power method	(1) Universal AC input, 100—240V AC, 2A Max., 50/60 Hz
Power supply	AC/DC, internal, 150W
Supported voltage range	100—240V AC
Max PoE power	120W
Max. PoE+ wattage per port by PSE	32W
Voltage range PoE mode	PoE: 44—57V PoE+: 50—57V

LCM Display	(1) 1.3" color touchscreen
Mounting	Desktop-mountable (Do not physically stack the USW-Enterprise-8-PoE.)
ESD/EMP protection	Air: $\pm 16\text{kV}$, contact: $\pm 12\text{kV}$
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

LEDs

System	Status
Ethernet	Link/activity
SFP+	Link/activity

Application Requirements

UniFi Network	Version 6.3.51 and later
----------------------	--------------------------

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.