

Tech Specs

UniFi UISP Branding

UniFi Cloud Gateways

WiFi

Switching

Cloud Keys & Gateways

Camera Security

Door Access

Phone System

New Integrations


Accessories

Switching > [Flex 10 GbE](#)

Datasheet

Installation Guide

Marketing Images

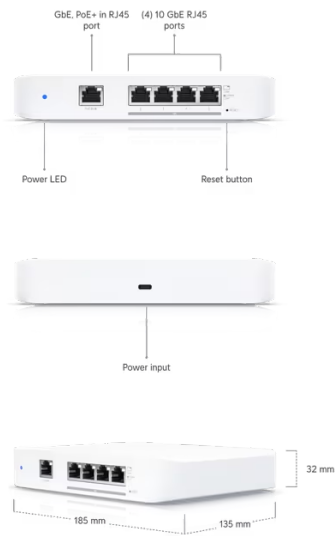

Mechanical

Dimensions	135 x 185 x 32 mm (5.3 x 7.3 x 1.3")
Weight	1.2 kg (2.6 lb)
Enclosure material	Polycarbonate

Hardware

Management interface	Ethernet In-Band
Networking interface	(1) GbE, PoE+ RJ45 port (4) 10 GbE RJ45 ports
Total non-blocking throughput	41 Gbps
Switching capacity	82 Gbps
Forwarding rate	61,012 Mpps
Power method	(1) PoE+, 50—57V DC, 25W (1) USB Type-C, 5V DC, 5A
Power supply	PoE+ (Pins 1, 2+/3, 6- or 4, 5+/7, 8-) AC/DC power adapter, 5V DC, 5A, 1.5 m cord (Included)
Supported voltage range	90—264V AC (Adapter)
Max. power consumption	25W
ESD/EMP protection	Air: ± 16kV, contact: ± 12kV
Button	Factory reset
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	10 to 90% noncondensing

Certifications

CE, FCC, IC

LEDs

System

Status

Ethernet

Speed/link/activity

Application Requirements

UniFi Network

Version 6.1.67 and later

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.