

Tech Specs

UniFi UISP Branding


[UniFi Cloud Gateways](#) [WiFi](#) [Switching](#) [Cloud Keys & Gateways](#) [Camera Security](#) [Door Access](#) [Phone System](#) [New Integrations](#) [Accessories](#)

Camera Security > [AI Bullet](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

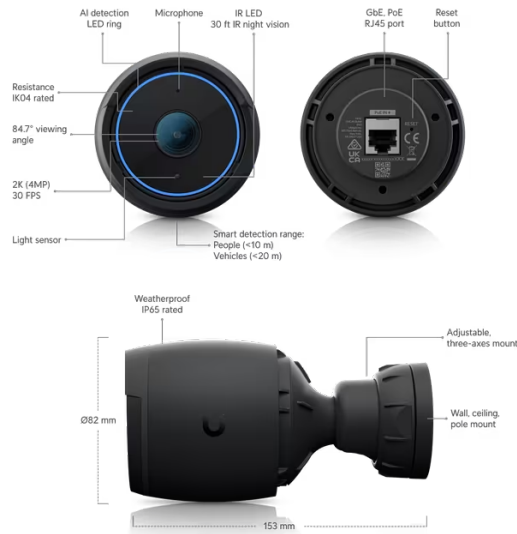

Mechanical

Dimensions	Without mount: Ø82 x 88.3 mm (Ø3.23 x 3.48") With wall mount: Ø82 x 153 mm (Ø3.23 x 6.02")
Weight	Without mount: 628 g (1.38 lb) With wall mount: 765 g (1.69 lb)
Enclosure materials	Aluminum alloy, polycarbonate
Mounting materials	Wall mount: aluminum alloy Pole mount: aluminum alloy
Weatherproofing	IP65
Resistance	IK04

Optics

Sensor	5MP CMOS sensor
Lens	Fixed focal length
View angle	H: 84.7°, V: 46.2°, D: 99°
Night mode	Built-in IR LED illumination and an IR cut filter

Video

Video compression	H.264
Resolution	4MP 2688 x 1512 (16:9)
Max. frame rate	30 FPS
Image settings	Brightness, contrast, sharpness, saturation, noise reduction, 50/60 Hz

System

Processor	Quad-core Arm® Cortex®-A53 based chip
Networking interface	GbE RJ45 port
Max. power consumption	7.68W
Power method	PoE
Supported voltage range	37—57V DC
LED	R/G/B/W ring
Button	Factory reset
Mounting	Wall, pole mount (Included)
Operating temperature	-20 to 40° C (-4 to 104° F)
Operating humidity	10 to 90% noncondensing
Certifications	FCC, IC, CE


Audio

Microphone	Yes (Can be disabled)
------------	-----------------------

Software

Web application	UniFi Protect: Version 1.20.0 and later
Mobile app	UniFi Protect iOS™: Version 1.5.6 and later UniFi Protect Android™: Version 1.4.7 and later

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.