

Tech Specs

UniFi UISP Branding


[UniFi Cloud Gateways](#) [WiFi](#) [Switching](#) [Cloud Keys & Gateways](#) [Camera Security](#) [Door Access](#) [Phone System](#) [New Integrations](#) [Accessories](#)

Camera Security > [G5 Dome](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

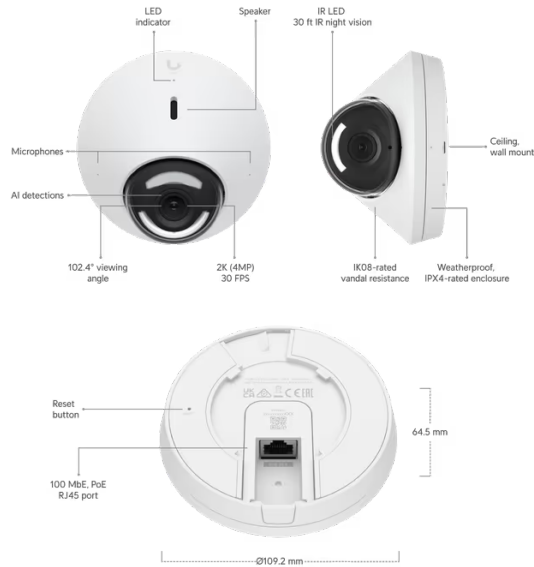

Mechanical

Dimensions	Ø109.2 x 64.5 mm (Ø4.3 x 2.5")
Weight	Without mount: 370 g (13.05 oz) With mount: 390 g (13.76 oz)
Enclosure materials	Aluminum alloy, polycarbonate, hard-coated dome
Mount materials	Polycarbonate, stainless steel
Weatherproofing	IPX4
Resistance	IK08

Optics

Sensor	5MP CMOS sensor
Lens	Fixed focal length
View angle	H: 102.4°, V: 71.4°, D: 134.3°
Night mode	Built-in IR LED illumination and IR cut filter

Video

Video compression	H.264
Resolution	4MP 2688 x 1512 (16:9)
Max. frame rate	30 FPS
Image settings	Color, brightness, sharpness, contrast, white balance, exposure control, 2DNR, 3DNR, NR by motion, masking, text overlay

System

Processor	Dual-core Arm® Cortex®-A7 based chip
Networking interface	10/100 MbE RJ45 port
Max. power consumption	5W
Power method	PoE
Supported voltage range	37-57V DC
LED	R/G/B/W
Button	Factory reset
Mounting	Wall, ceiling mount
Operating temperature	-20 to 40° C (-4 to 104° F)
Operating humidity	0 to 90% noncondensing
Certifications	FCC, IC, CE


Audio

Microphone	Yes (Can be disabled)
Speaker	Yes

Software

Web application	UniFi Protect: Version 2.2.7 or 2.7.28 and later
Mobile app	UniFi Protect iOS™ and Android™: Version 1.10.0 and later

Stay in Touch



[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.