

Tech Specs

UniFi UISP Branding

[UniFi Cloud Gateways](#)

[WiFi](#)

[Switching](#)

[Cloud Keys & Gateways](#)

[Camera Security](#)

[Door Access](#)

[Phone System](#)

[New Integrations](#)


[Accessories](#)

Switching > [Pro 8 PoE](#)

[Datasheet](#)

[Installation Guide](#)

[Marketing Images](#)

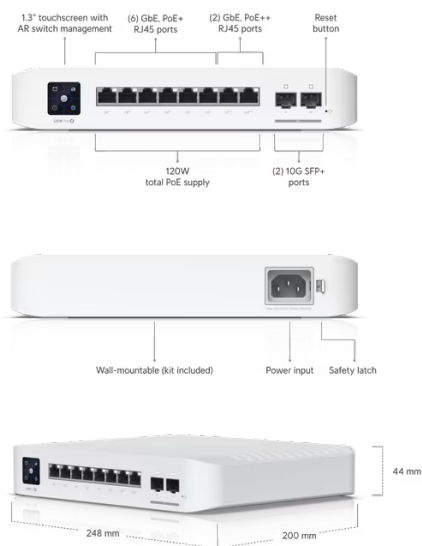

Mechanical

Dimensions	200 x 248 x 44 mm (7.9 x 9.8 x 1.7")
Weight	2.1 kg (4.6 lb)
Enclosure materials	Plastic, metal
Mount material	Plastic

Hardware

Management interface	Ethernet In-Band
Networking interface	(8) GbE RJ45 ports (2) 10 Gbps SFP+ ports
PoE interface	(6) PoE/PoE+ (Pins 1, 2+; 3, 6-) (2) 60W PoE++ (Pair A 1, 2+; 3, 6-) (Pair B 4, 5+; 7, 8-)
Total non-blocking throughput	28 Gbps
Switching capacity	56 Gbps
Power method	Universal input, 100—240V AC, max. 2A
Power supply	AC/DC, internal
Supported voltage range	100—240V AC
Max. power consumption	30W (Excluding PoE output)
Total available PoE	120W
Max. PoE wattage per port by PSE	PoE: 15W PoE+: 30W PoE++: 60W

Voltage range PoE mode	PoE: 44—57V PoE+: 50—57V PoE++: 50—57V
LCM display	(1) 1.3" touchscreen
LEDs	RJ45 ports: link/activity
Button	Factory reset
Operating temperature	-5 to 45° C (23 to 113° F)
Operating humidity	10 to 90% noncondensing
Certifications	CE, FCC, IC

Application Requirements

UniFi Network	Version 7.5.176 and later
----------------------	---------------------------

Stay in Touch

[Terms and Conditions](#) | [Terms of Service](#) | [Privacy Policy](#) | [Return Policy](#) | [Cookies Settings](#)

© 2024 Ubiquiti, Inc. All rights reserved.